


■ 执行标准 (Applicable Standards)

IEC289: 1987 Reactor
 GB10229-88 Reactor (equiv IEC289: 1987)
 JB9644-1999 Reactors used for semiconductor electrical driving

■ 产品尺寸图 (Product Size)

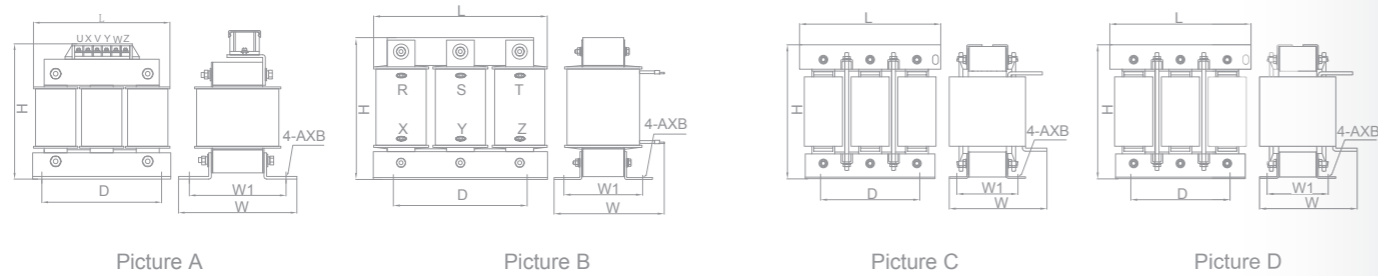

380V 输出电抗器 380V AC Output Reactor

电抗器型号 Reactor Type	图号 Picture NO.	适配 功率 Power (kw)	额定 电流 Rated Current(A)	电感量 Inductance Value(mH)	压降 Voltage Drop	绝缘等级 Insulation rank	尺寸 Dimension(±5mm)					
							L	D	W	W1	H	A×B
OCR-0005-1M40-0.4SC	图 A Picture A	1.5	5	1.4	1%	F、H	110	90	95	70	130	6X11
OCR-0007-1M00-0.4SC		2.2	7	1	1%	F、H	110	90	95	70	130	6X11
OCR-0010-0M70-0.4SC		3.7	10	0.7	1%	F、H	110	90	95	70	130	6X11
OCR-0015-0M47-0.4SC		5.5	15	0.47	1%	F、H	110	90	95	70	130	6X11
OCR-0020-0M35-0.4SC	图 B Picture B	7.5	20	0.35	1%	F、H	110	90	95	70	130	6X11
OCR-0030-0M23-0.4SC		11	30	0.23	1%	F、H	155	95	90	76	150	6×15
OCR-0040-0M18-0.4SC		15	40	0.18	1%	F、H	155	95	130	78	135	6×15
OCR-0050-0M14-0.4SC		18.5	50	0.14	1%	F、H	155	95	140	76	135	6×15
OCR-0060-0M12-0.4SC	图 C Picture C	22	60	0.12	1%	F、H	195	120	135	72	165	8.5×20
OCR-0080-087U-0.4SC		30	80	0.087	1%	F、H	195	120	135	92	165	8.5×20
OCR-0090-078U-0.4SC		37	90	0.078	1%	F、H	195	120	135	72	165	8.5×20
OCR-0120-058U-0.4SA		45	120	0.058	1%	F、H	230	150	170	83	220	11×18
OCR-0150-047U-0.4SA	图 D Picture D	55	150	0.047	1%	F、H	230	150	170	88	220	11×18
OCR-0200-035U-0.4SA		75	200	0.035	1%	F、H	230	150	180	98	220	11×18
OCR-0250-028U-0.4SA		110	250	0.028	1%	F、H	250	182	175	98	230	11×18
OCR-0290-024U-0.4SA		132	290	0.024	1%	F、H	290	214	200	107	250	11×18
OCR-0330-021U-0.4SA	图 C Picture C	160	330	0.021	1%	F、H	290	214	200	107	250	11×18
OCR-0390-018U-0.4SA		185	390	0.018	1%	F、H	290	214	200	107	250	11×18
OCR-0490-014U-0.4SA		220	490	0.014	1%	F、H	320	243	230	125	320	12×20
OCR-0600-012U-0.4SA		280	600	0.012	1%	F、H	320	243	250	140	320	12×20
OCR-0660-011U-0.4SA	图 D Picture D	300	660	0.011	1%	F、H	320	243	250	140	320	12×20
OCR-0800-08U7-0.4SA		380	800	0.0087	1%	F、H	365	260	280	135	380	15×25
OCR-1000-07U0-0.4SA		450	1000	0.007	1%	F、H	365	260	280	135	380	15×25
OCR-1200-05U8-0.4SA		550	1200	0.0058	1%	F、H	395	275	325	150	390	15×25
OCR-1600-04U3-0.4SA		630	1600	0.0043	1%	F、H	395	275	325	150	435	15×25

备注：其他规格尺寸，可根据用户要求制造。Remark: Dimension can be customization

690V 输出电抗器 690V AC Output Reactor

电抗器型号 Reactor Type	图号 Picture NO.	适配 功率 Power (kw)	额定 电流 Rated Current(A)	电感量 Inductance Value(mH)	压降 Voltage Drop	绝缘等级 Insulation rank	尺寸 Dimension(±5mm)					
							L	D	W	W1	H	A×B
OCR-0005-2M80-0.7SC	图 A Picture A	3.7	5	2.8	1%	F、H	155	80	180	95	61	6X15
OCR-0007-2M00-0.7SC		5.5	7	2	1%	F、H	155	80	180	95	61	6X15
OCR-0010-1M40-0.7SC		7.5	10	1.4	1%	F、H	155	80	200	95	63	6X15
OCR-0015-0M93-0.7SC		11	15	0.93	1%	F、H	155	80	200	95	63	6X15
OCR-0020-0M70-0.7SC	图 B Picture B	15/18.5	20	0.7	1%	F、H	155	80	200	95	63	6X15
OCR-0030-0M47-0.7SC		22	30	0.47	1%	F、H	195	130	165	120	72	8.5X20
OCR-0040-0M35-0.7SC		30	40	0.35	1%	F、H	195	130	165	120	72	8.5X20
OCR-0050-0M28-0.7SA		37/45	50	0.28	1%	F、H	195	150	165	120	92	8.5X20
OCR-0060-0M23-0.7SA	图 C Picture C	55	60	0.23	1%	F、H	195	150	165	120	92	8.5X20
OCR-0080-0M18-0.7SA		75	80	0.18	1%	F、H	195	170	165	120	112	8.5X20
OCR-0120-0M12-0.7SA		110	120	0.12	1%	F、H	250	190	230	182	103	11X18
OCR-0150-094U-0.7SA		132	150	0.094	1%	F、H	250	200	230	182	113	11X18
OCR-0200-070U-0.7SA	图 D Picture D	160/185	200	0.07	1%	F、H	290	220	250	214	117	11X18
OCR-0250-055U-0.7SA		220	250	0.055	1%	F、H	290	220	250	214	117	11X18
OCR-0290-048U-0.7SA		240	290	0.048	1%	F、H	320	250	320	243	135	12X20
OCR-0330-042U-0.7SA		280/300	330	0.042	1%	F、H	320	250	320	243	135	12X20
OCR-0390-036U-0.7SA	图 C Picture C	380	390	0.036	1%	F、H	320	250	320	243	135	12X20
OCR-0490-028U-0.7SA		450	490	0.028	1%	F、H	320	270	320	243	160	12X20
OCR-0600-023U-0.7SA		550	600	0.023	1%	F、H	365	285	340	260	165	15X25
OCR-0660-021U-0.7SA		630	660	0.021	1%	F、H	365	285	340	260	165	15X25

备注：其他规格尺寸，可根据用户要求制造。Remark: Dimension can be customization

■ 成品识别码 (Product Identification Code)

